



UNDERCUT FOR GOOD REASON

Undercut ensures the seed is placed to the side of the couler line. Although the press wheel applies pressure over the seed it runs to the side of the couler trench.



COULER SIZE

Trash is handled easily by the 500mm couler.



UNIQUE ROTARY SCRAPERS

Square self-cleaning scrapers effective in trash and moisture continue to turn when others block up.



CHOICE OF BAR SIZE

GSD 500 units are available to suit 100mm x 100mm and 178mm x 178mm bars. Other sizes by special request.

EASY DEPTH ADJUSTMENT

Adjustments are made via a stud through a quadrant.

The stud has a handgrip attached so no spanners are required.



SPRING PRESSURE

Four settings obtainable by easy pin adjustment from 120kg to 280 kg.



SEMI PNEUMATIC PRESS WHEELS

Rubber press wheels featuring double wall thickness for longer life. Four easy pin adjustments allow you to obtain the desired pressure over the seed.



LIFT AND PARK UNITS NO NEED TO MOVE

Reposition spring carrier and lift units to park when other row spacings are required.





UNIT WEIGHT

GSD 500 units are of robust design and have the weight to perform in tough zero till conditions. Each unit weighs 130kg.



CHECK OUT THE BEARINGS

The bearing in the main hub is also used in the automotive industry, therefore are easily obtainable if required."



PURCHASE TO MEET YOUR REQUIREMENTS

You may purchase individual row units or have them mounted on a Gessner manufactured frame.



OFF CENTRE HITCHES

If you require a 3 point hitch which enables you to move the machine off centre both ways then the Gessner frame will fill your need.


HOWS THIS FOR STRENGTH

Each unit features 30mm x 120mm bisalloy mainframe side arms, so they are built to last.



BUSHED PIVOT POINTS

Each pivot is bushed with Austlon oil impregnated outer bushes and hard chrome pins.

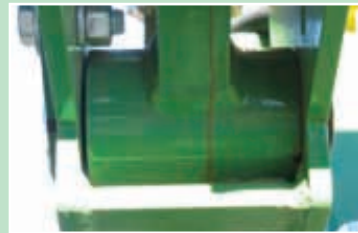

GESSNER FRAMES

Rugged construction and built to last. You will find one to suit your requirements, 3 point linkage or trailed folding and non-folding machines. Special requests are catered for on an individual basis.



FRAME WEIGHT KEEPS UNITS IN WORK

All of the Gessner frames are fabricated from 178mm x 178mm x 9.5mm RHS and are heavy enough to keep the row units working at the depth you demand.

