

TRANSPORTABLE WATER TOWER


3.8 MTRS FROM
GROUND TO
DISCHARGE SPOUT

PATENT
PENDING

50000 LTR HOLDING CAPACITY
WITH SUPER FAST DISCHARGE
15000 LTRS PER MIN

DESCRIPTION AND SPECIFICATIONS

- TANK CAPACITY 50000 LTRS
- FILL PIPE OPTIONS 4" to 8" Ø WITH FLOAT SHUT OFF
- DISCHARGE PIPE 12" Ø WITH BUTTERFLY VALVE FOR FAST FILL, 15000 LTRS PER MIN
- INSIDE OF TANK PAINTED - AMERLOCK 2K PAINT SYSTEM, GOOD RESISTANCE MOST CHEMICALS AND WEAK ACIDS, IMMERSION SUITABLE FRESH OR SEA WATER
- OUTSIDE OF TANK AND SUPPORT FRAME PAINTED : 2 PACK
- HYDRAULIC RAISE AND LOWER (empty only)
- LIFTED BY 5" AND 6" BORE HYDRAULIC CYLINDERS
- 8 HP HYDRAULIC POWER PACK IN SKID FRAME WHICH CAN BE REMOVED FROM SUB FRAME FOR STORAGE
- STORAGE AREA FOR WATER PUMP AND ASSOCIATED HOSES
- SWING-OUT OUTRIGGERS FOR EXTRA STABILITY
- ENGINEERED CERTIFIED TO WITHSTAND 120 KM WINDS IN THE UP POSITION "EMPTY"
- ONCE LOWERED UNIT CAN BE RELOCATED WITH STANDARD PRIME MOVER (tank cannot be moved with any water inside)
- REGISTERED FOR ROAD USE, STANDARD 50mm KING PIN FOR CONNECTION TO PRIME MOVER
- AUXILIARY WATER PUMP OPTIONS AND HOSE REELS AVAILABLE TO SUIT YOUR REQUIREMENTS
- HYDRAULIC OPEN AND CLOSE OF 12" VALVE OPTION AVAILABLE
- STANDARD ACCESS LADDER AND TOP SERVICE PLATFORM OPTIONS

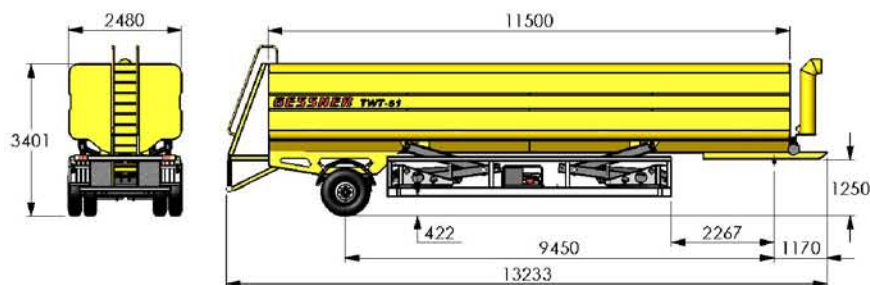

Gessner Water Towers are manufactured with quality and long life in mind, their solid construction and sprung axle means they can handle the stresses place upon the unit when moving from site to site. The Tanks are sold direct from our Toowoomba based Factory to the customer.

If the option of purchasing a unit does not suit your project, we offer short and long term hire packages.

Gessner Industries reserves the right to alter any specifications without notice.



Reap the benefits
GESSNER INDUSTRIES

20 Molloy Street, Toowoomba Q 4350 | www.gessner.com.au
P. 07 4634 3477 | F. 07 4633 1973 | E. manager@gessner.com.au